PSS®

PSS CCTV is The World's Best, Simple, Reliable and Affordable Solution

PS-3CNEB4PM

4MP IR Fixed Bullet PoE Network Camera

KEY FEATURES:

- Up to 4 megapixel (2560x1440) Resolution
- Support Onvif, can connect with any other Onvif complaint NVR
- H.265 video compression with high compression ratio, ROI (region of interest) encoding
- Progressive scan CMOS, capture motion video without incised margin
- Support dual stream, and the sub-stream for mobile surveillance
- High-performance and long service life Infrared LED, Approx. 20 to 30 meters IR range
- IR cut filter with auto switch
- PoE (Power over Ethernet)
- Ingress Protection level: IP66
- Electronic shutter for different surveillance environments
- Other functions: alarm, ROI, Mirror, Defog etc
- Support VCA, which is compatible with NVR for the second time of video searching and analyzing
- Self-Maintenance ,Stepless IR, Stepless White Light Mode

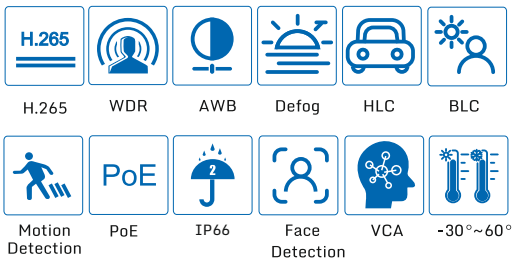

RoHS CE FC PoE ONVIF

www.psscamera.com

PSS CCTV is The World's Best,
Simple, Reliable and Affordable Solution

DETAILED SPECIFICATION

Description	4MP Network BULLET CAMERA
Sensor type	1/3 9' 4 Megapixel F4G
Minimum Illumination	0.01Lux
S/N Ratio	>50db
Shutter	1/25-1/10000s(adjustable),4 Shutter areas can be Set
Wide Dynamic Range	D-WDR
Digital Noise Reduction	3D-DNR
Backlight compensation	Yes, zone optional
OSD	Supports OSD Setting and Network timing
White Balance	Auto White Balance For Different Environments
Audio	No
Lens	3.6MM/6MM (Optional)
Day/Night	ICR-Infrared Filter
Video Compression	H.265/H.264
Bit Rate	64-12000Kbps
Max. Resolution	2560*1440
Max Frame Rate	25FPS
Image Setting	Brightness, Contrast, Saturation, Sharpness Can be adjusted
Storage function	FTP,LOCAL,NVR,SMTP,CLOUD
Onvif	Supports
Intelligent alarm	Motion Detection, Privacy
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
General function	Dual Stream/Mirror/ROI/Defog Mode
Stream Types	Main Stream 2304*1296 , Sub Stream D1(704*576)/ 360P(640*360)/ CIF(352*288)
Communication interface	1 RJ45 (10M/100M) Adaptive Ethernet Port
Audio input (optional)	1CH,MIC IN/Line IN
Temperature	-20 Degree Celsius ~ 60 Degree Celsius
Humidity	0%-90%RH Without Condensation
Power Supply	DC12V+/- 10% /PoE(802.3af)
Power Consumption	Max 6WH
Material	Front Cover: Metal; Back Cover&Bracket: Metal
Ingress Protection leve	Ip66
IR Range	30 Meters
Dimensions	Less Than 500g(1.1 Lbs)