



*PSS CCTV is The World's Best,
Simple, Reliable and Affordable Solution*


PS-3CNEB4PP

4MP IR Fixed Bullet *PoE* Network Camera



KEY FEATURES:

- Up to 4 megapixel (2688 × 1520) resolution
- Support Onvif, can connect with any other Onvif complaint NVR
- H.265 video compression with high compression ratio, ROI (region of interest) encoding
- Progressive scan CMOS, capture motion video without incised margin
- Support dual stream, and the sub-stream for mobile surveillance
- High-performance and long service life Infrared LED, Approx. 20 to 30 meters IR range
- IR cut filter with auto switch
- PoE (Power over Ethernet)
- Ingress Protection level: IP66
- Electronic shutter for different surveillance environments
- Other functions: alarm, ROI, Mirror, Defog etc
- Support VCA, which is compatible with NVR for the second time of video searching and analyzing
- Self-Maintenance ,Stepless IR, Stepless White Light Mode

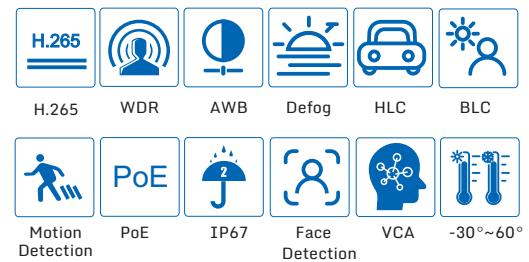

www.psscamera.com

www.psscamera.com



*PSS CCTV is The World's Best,
Simple, Reliable and Affordable Solution*

DETAILED SPECIFICATION

Description	4MP Network BULLET CAMERA
Sensor type	1/2.9" 4 Megapixel S03 Sensor
Minimum Illumination	0.01Lux
S/N Ratio	>50db
Shutter	1/25-1/10000s(adjustable),4 Shutter areas can be Set
Wide Dynamic Range	D-WDR
Digital Noise Reduction	3D-DNR
Backlight compensation	Yes, zone optional
OSD	Supports OSD Setting and Network timing
White Balance	Auto White Balance For Different Environments
Lens	3.6MM/6MM (Optional)
Day/Night	ICR-Infrared Filter
Video Compression	H.265/H.264
Bit Rate	64-12000Kbps
Max. Resolution	2688 *1520
Max Frame Rate	20FPS
Image Setting	Brightness, Contrast, Saturation, Sharpness Can be adjusted
Storage function	FTP,LOCAL,NVR,SMTP,CLOUD
Onvif	Supports
Intelligent alarm	Motion Detection, Privacy
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP
General function	Dual Stream/Mirror/ROI/Defog Mode
Stream Types	Main Stream 2304*1296 , Sub Stream D1(704*576)/ 360P(640*360)/ CIF(352*288)
Communication interface	1 RJ45 (10M/100M) Adaptive Ethernet Port
Audio input (optional)	1CH,MIC IN/Line IN
Temperature	-20 Degree Celsius ~ 60 Degree Celsius
Humidity	0%-90%RH Without Condensation
Power Supply	DC12V+/- 10% /PoE(802.3af)
Power Consumption	Max 6WH
Material	Front Cover: Plastic; Back Cover&Bracket: Metal
Ingress Protection leve	Ip66
IR Range	30 Meters
Dimensions	Less Than 500g(1.1 Lbs)